





## Test availability exceptions

For existing availability settings, you can make exceptions for individual students or groups. Use exceptions to provide an accommodation to a student who is disabled or for technology and language differences.

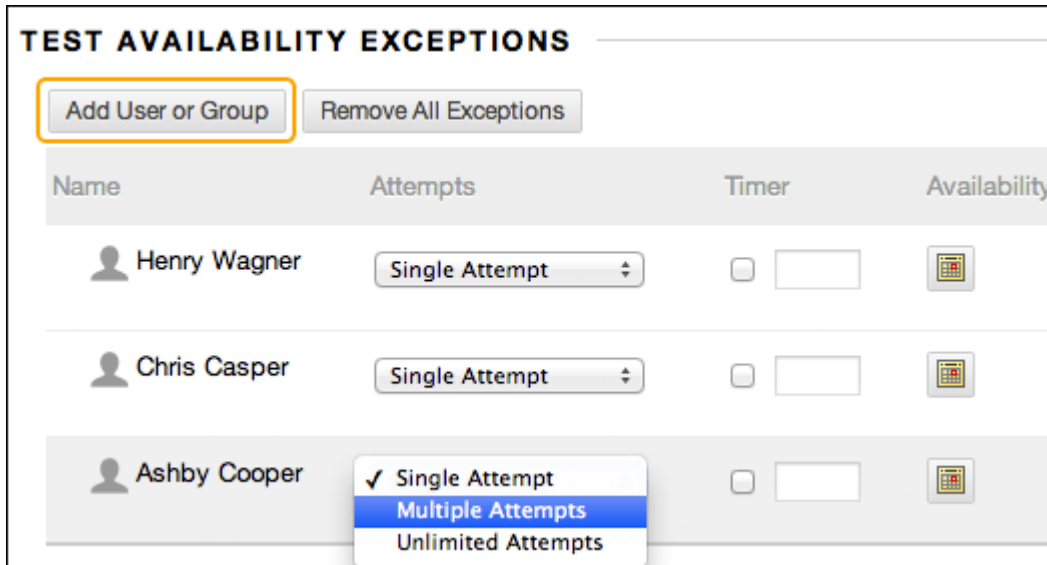

| Name         | Attempts  | Timer   | Availability   |
|--------------|---|---|--|
| Henry Wagner | Single Attempt  | <input type="checkbox"/> <input type="text"/> |   |
| Chris Casper | Single Attempt  | <input type="checkbox"/> <input type="text"/> |   |
| Ashby Cooper | <ul style="list-style-type: none"><li>✓ Single Attempt</li><li>Multiple Attempts</li><li>Unlimited Attempts</li></ul> | <input type="checkbox"/> <input type="text"/> |  |

### Example:

For a test with one attempt, you can allow more attempts for a student who is blind and wants to use screen reader technology for the first time.

If the settings exist for a test or survey, you can create these exceptions:

- Number of attempts
- Timer
- Availability
- Force completion
- Restrict location